

POWER RELAY 1 POLE - High Capacity 32A Type

FTR-K3-PV Series

■ FEATURES

- 1 pole, 32A
- 1 form A contact
- Wide contact gap: 1.5mm
 Surge strength (B/T open contacts) 2.5kV
 Compliant with European photovoltaic standard (VDE0126)
- High insulation in small package (between coil and contacts)
 - Dielectric strength: AC 4,000V
 - Surge strength: 6,000V
- Low coil power consumption: 1,200mW
- Coil holding voltage can be reduced up to 35% of nominal coil voltage (ambient temperature; +20 °C, contact current; 32A) Power consumption at the lowest coil holding voltage; 147mW
 - * Coil holding voltage is the coil voltage after 100ms of applied nominal coil voltage
- Plastic materials: Flammability; UL94 V-0
- Cadmium-free contacts
- Flux free, cat. RTII protection
- RoHS compliant.
 Please see page 5 for more information



■ PARTNUMBER INFORMATION

[Example] $\frac{\text{FTR-K3}}{\text{(a)}} \quad \frac{A}{\text{(b)}} \quad \frac{B}{\text{(c)}} \quad \frac{012}{\text{(d)}} \quad \frac{W}{\text{(e)}} - \frac{PV}{\text{(f)}}$

(a)	Relay type	FTR-K3	: FTR-K3-Series
(b)	Contact configuration	А	: 1 form A / PCB type
(c)	Coil power	В	: Standard (1,200mW)
(d)	Coil rated voltage	012	: 548 VDC Coil rating table at page 3
(e)	Contact material	W	: Silver alloy
(f)	Option code	PV	: High current (32A) / contact gap 1.5mm

E.g.: Ordering code: FTR-K3AB012W-PV Actual marking: K3AB012W-PV

1

FTR-K3-PV SERIES

SPECIFICATION

Item			FTR-K3 high capacity type		
Contact Data	Configuration		1 form A		
	Material		Silver alloy		
	Resistance (initial)		Max. 100 mΩ at 6VDC, 1A		
	Contact rating (resistive)		32A, 250VAC		
	Max. carrying current		32A		
	Max. switching voltage		250VAC		
	Max. switching power		8,000VA		
	Max. switching current		32A		
	Min. switching load *1		100mA, 5VDC (reference value)		
Life	Mechanical		Min. 1 x 10 ⁶ operations		
	Electrical (resistive)		32A / 250VAC, min. 30 x 10 ³ operations		
	Electrical (inductive)		Endurance: 32A, 250VAC, $\cos \varphi = 0.8$, min. 30×10^3 operations Overload: 48A, 250VAC, $\cos \varphi = 0.8$, min. 50 operations		
Coil Data	Rated power (at 20 °C)		1,200mW		
	Operate power (at 20 °C)		590mW		
	Coil power at holding volt	age	147mW (35% of nominal coil voltage)		
	Holding voltage range *2		35~120% of nominal coil voltage (32A at + 20 °C) 45~80% of nominal coil voltage (32A at + 85 °C)		
	Operating temperature ra	nge	-40 °C to +60 °C (coil nominal voltage) -40 °C to +85 °C (holding voltage; 45~80% of nominal coil voltage)		
Timing Data	Operate (at nominal volta	nge)	Max. 20ms (without bounce)		
-	Release (at nominal volta	ige)	Max. 10ms (no diode, without bounce)		
Insulation	Contact gap (initial)		Min. 1.5mm		
	Resistance		Min. 1,000MΩ at 500VDC		
	Dielectric strength	Open contacts	2,500VAC (50/60Hz) 1min		
		Contacts to coil	4,000VAC (50/60Hz) 1min		
	Surge strength	Contacts to coil	6,000V / 1.2 x 50μs standard wave		
	Clearance		Min. 6.0mm		
	Creepage		Min. 8.0mm		
	EN61810-1, VDE0435	Voltage	250VAC		
		Pollution degree	3		
		Material group	Illa		
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.5mm		
	אוטומנוטוו ופאאנמוונפ	Endurance	10 to 55Hz double amplitude 1.5mm		
	Shock	Misoperation	Min. 200m/s ² (11 ± 1ms)		
	SHOCK	Endurance	Min. 1,000m/s ² (6 ± 1ms)		
	Weight		Approximately 25g		

^{*1} Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.
*2 Coil holding voltage is the coil voltage after 100ms of applied nominal coil voltage.

COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *1	Must Release Voltage (VDC) *1	Min. Non Release Voltage (VDC) *1	Rated Power (mW)
005	5	21	3.5	0.5	1.75	
006	6	30	4.2	0.6	2.1	
009	9	68	6.3	0.9	3.15	
012	12	120	8.4	1.2	4.2	1,200 (147)*²
018	18	270	12.6	1.8	6.3	(147) -
024	24	480	16.8	2.4	8.4	
048	48	1,920	33.6	4.8	16.8	


Note: All values in the table are valid for 20°C and zero contact current. *1 Specified operate values are valid for pulse wave voltage. *2 This value is the coil power at 35% of nominal voltage at 20°C.


SAFETY STANDARDS


Туре	Compliance	Contact rating
UL	UL 508	Flammability: UL 94-V0 (plastics)
	CSA 22.2 No.14 (approved by cULus)	32A, 277VAC (General use at +60 °C) 30,000 cycles
VDE	IEC61810-1	32A, 250VAC (cos φ = 0.8 at +85 °C) 30,000 cycles

CHARACTERISTIC DATA

The graphs are based on measurement data and are typical values.









FTR-K3-PV SERIES


Electrical life tests (resistive load)






DIMENSIONS


Dimensions

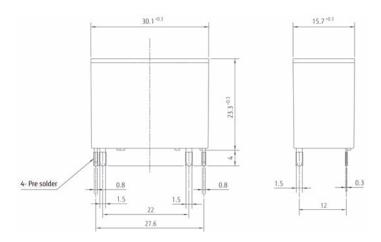

Schematics (BOTTOM VIEW)



 PC board mounting hole layout (BOTTOM VIEW)



Unit:mm

RoHS Compliance and Lead Free Information

1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005.
 (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.
 This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profile

• Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:

Pre-heating: maximum 120°C Soldering: dip within 5 sec. at 260°C solder bath

Solder by Soldering Iron:

Soldering Iron

Temperature: maximum 360°C Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

• Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

• Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

FTR-K3-PV SERIES

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited Gotanda-Chuo Building

3-5, Higashigotanda 2-chome, Shinagawa-ku

Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626

Email: promothq@ft.ed.fujitsu.com

Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970

Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components

Europe

Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910

Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Comp

#01-01 Citilink Warehouse Complex Singapore 118529

Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com

Web: http://www.fujitsu.com/sg/services/micro/components/

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 04, 2011