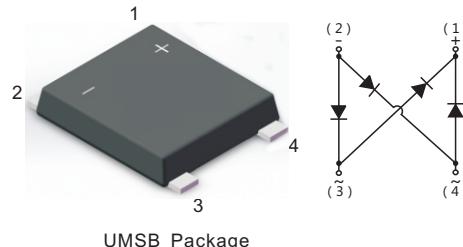


4A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER
FEATURES:

- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- Forward Current - 4.0 A
- Fast reverse recovery time
- Designed for Surface Mount Application


MECHANICAL DATA

- Case: UMSB
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.234g / 0.00825oz

PINNING

- 1, Output Anode (+) 3, Input Pin (~)
 2, Output Cathode (-) 4, Input Pin (~)

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	FMSB40B	FMSB40D	FMSB40G	FMSB40J	FMSB40K	FMSB40M	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_c = 115^\circ\text{C}$	I_o	4.0						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	95						A
Maximum Forward Voltage at 4.0 A	V_F	1.3						V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125^\circ\text{C}$	I_R	5.0 200						μA
Typical Junction Capacitance (Note1)	C_j	50						pF
Typical Thermal Resistance (Note2)	$R_{\theta JA}$ $R_{\theta JC}$ $R_{\theta UL}$	60 15 25						$^\circ\text{C}/\text{W}$
Maximum Reverse Recovery Time (Note3)	t_{rr}	150		250	500		ns	
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150						$^\circ\text{C}$

Note:1. Measured at 1 MHz and applied reverse voltage of 4 V D.C

2. Mounted on glass epoxy PC board with $4 \times 1.5'' \times 1.5''$ (3.81×3.81 cm) copper pad.

3. Measured with $I_F = 0.5 \text{ A}$, $I_R = 1 \text{ A}$, $I_{rr} = 0.25 \text{ A}$.

Fig.1 Average Rectified Output Current Derating Curve

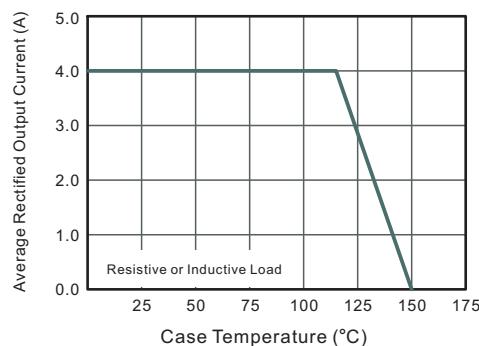


Fig.2 Typical Reverse Characteristics

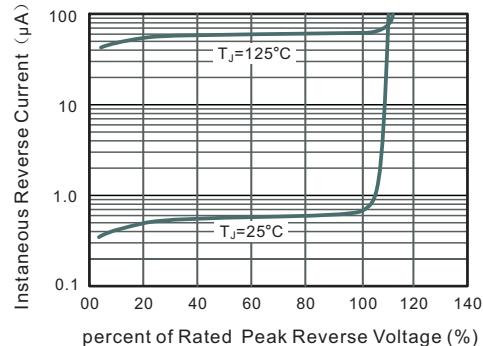


Fig.3 Typical Instantaneous Forward Characteristics

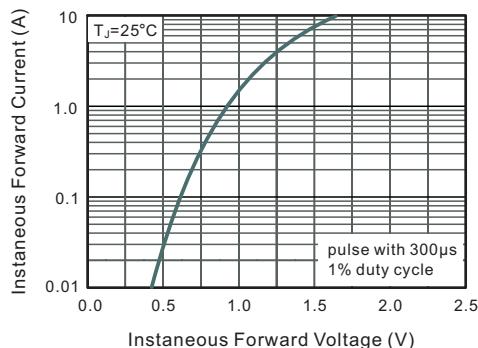


Fig.4 Typical Junction Capacitance

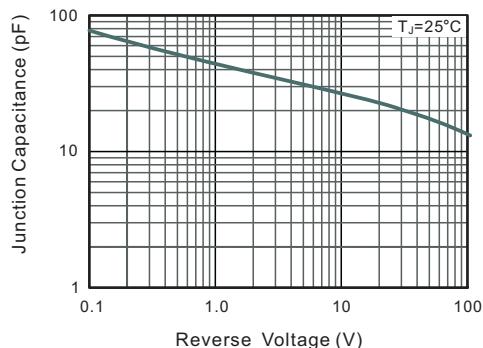


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


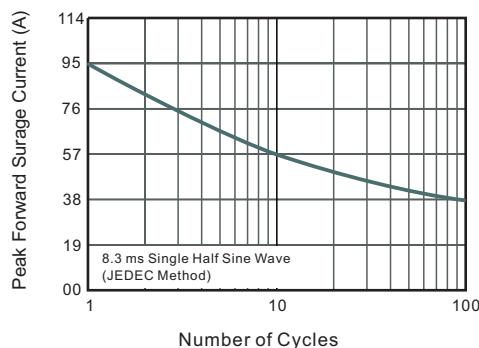



Fig.6- Typical Transient Thermal Impedance

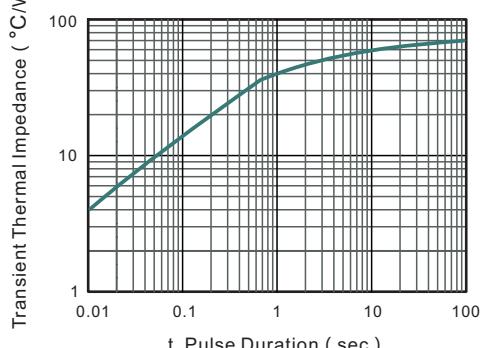

PACKAGE OUTLINE

Plastic surface mounted package; 4 leads


UMSB

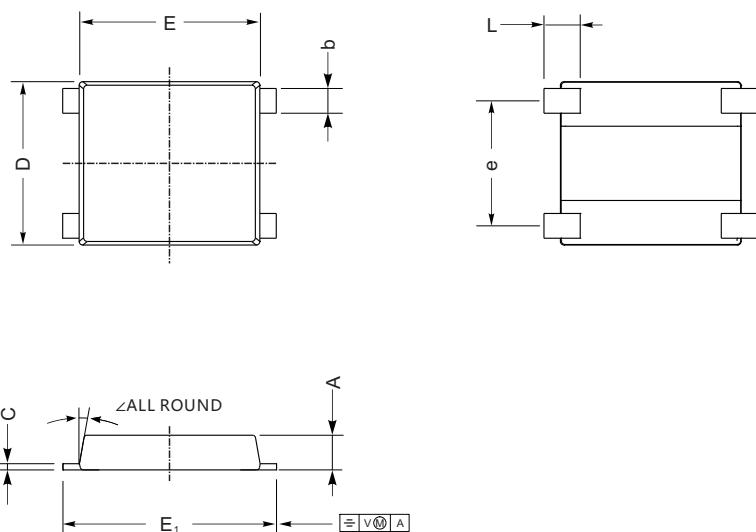

M2 mechanical data

UNIT		A	C	D	E	E ₁	L	e	b	∠
mm	max	1.5	0.29	7.0	7.6	8.9	1.6	5.3	1.15	10°
	min	1.3	0.17	6.2	7.1	8.4	1.0	4.9	0.95	
mil	max	59	12	276	299	350	55	209	45	10°
	min	51	7	244	280	331	31.5	193	37	

The recommended mounting pad size

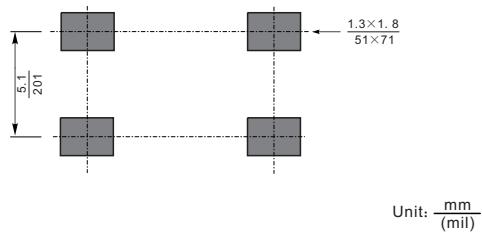

Marking

Type number	Marking code
FMSB40B	FMB40B
FMSB40D	FMB40D
FMSB40G	FMB40G
FMSB40J	FMB40J
FMSB40K	FMB40K
FMSB40M	FMB40M