

Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 2 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA


- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00053oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |

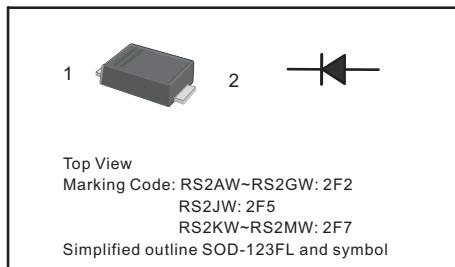

| Parameter | Symbols | RS2AW | RS2BW | RS2DW | RS2GW | RS2JW | RS2KW | RS2MW | Units | | | |
|---|-----------------------------------|------------|-------|-------|-------|-------|-------|-------|-------|--|--|--|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V | | | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V | | | |
| Maximum Average Forward Rectified Current at Ta = 65 °C | I _{F(AV)} | 2 | | | | | | A | | | | |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) | I _{FSM} | 50 | | | | | | A | | | | |
| Maximum Instantaneous Forward Voltage at 2 A | V _F | 1.3 | | | | | | V | | | | |
| Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C | I _R | 5 100 | | | | | | μA | | | | |
| Maximum Reverse Recovery Time ¹⁾ | t _{rr} | 150 | | 250 | 500 | | | ns | | | | |
| Typical Junction Capacitance at V _R =4V, f=1MHz | C _J | 40 | | | | | | pF | | | | |
| Typical Thermal Resistance ²⁾ | R _{θJA} | 90 | | | | | | °C/W | | | | |
| Operating and Storage Temperature Range | T _j , T _{stg} | -55 ~ +150 | | | | | | °C | | | | |

1) Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Fig.1 Forward Current Derating Curve

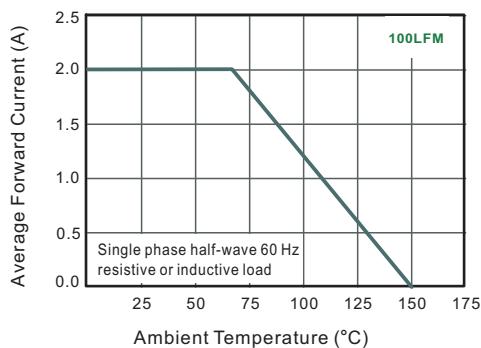


Fig.2 Typical Reverse Characteristics

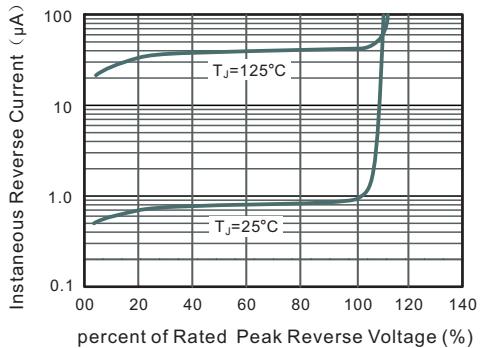


Fig.3 Typical Instantaneous Forward Characteristics

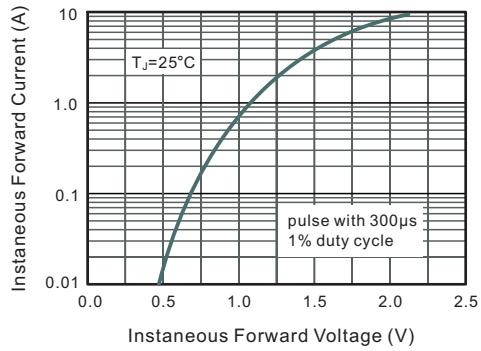


Fig.4 Typical Junction Capacitance


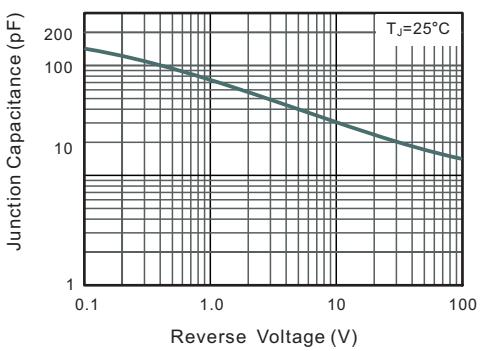



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

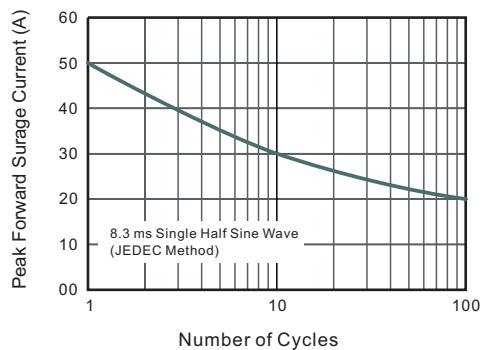


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL

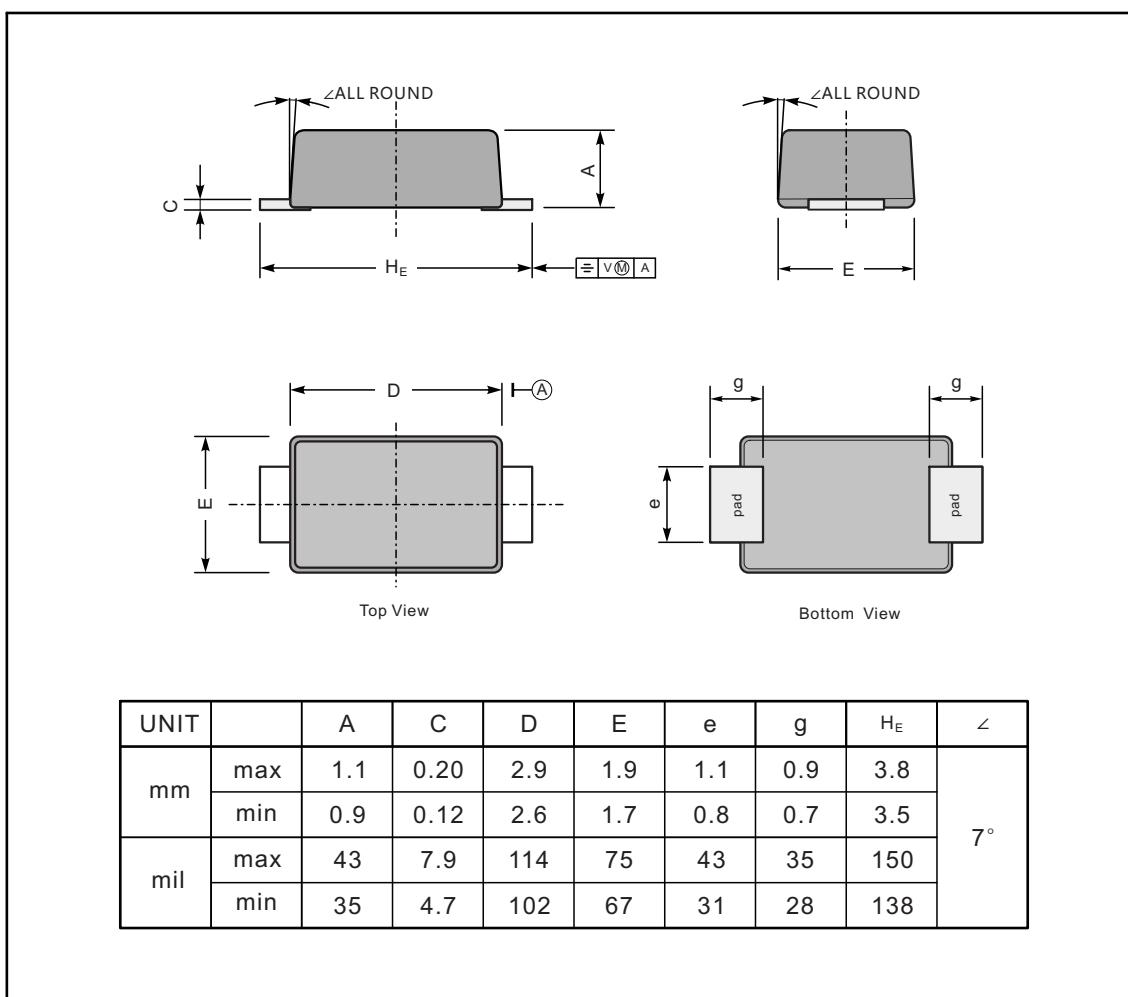

The recommended mounting pad size

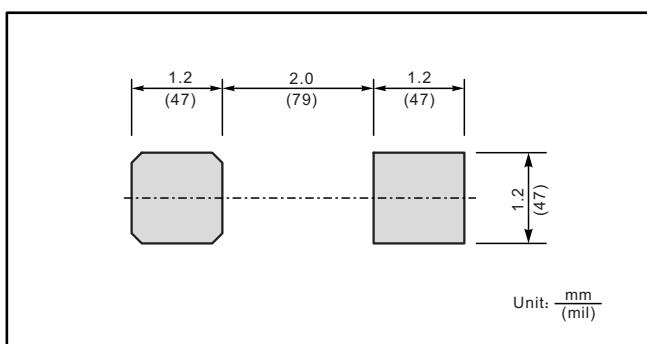

Marking

| Type number | Marking code |
|-------------|--------------|
| RS2AW | 2F2 |
| RS2BW | |
| RS2DW | |
| RS2GW | |
| RS2JW | 2F5 |
| RS2KW | 2F7 |
| RS2MW | |