

SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

Reverse Voltage - 50 to 1000 V

Forward Current - 3 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg 0.00086oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View
Marking Code: US3A~US3M
Simplified outline SMAF and symbol

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load for capacitive load current derate by 20 %.

Parameter	Symbols	US3AF	US3BF	US3DF	US3GF	US3JF	US3KF	US3MF	Units					
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V					
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V					
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V					
Maximum Average Forward Rectified Current at Ta = 65 °C	I _{F(AV)}	3						A						
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	100						A						
Maximum Instantaneous Forward Voltage at 3 A	V _F	1.0		1.4		1.7		V						
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C	I _R	5 300						µA						
Maximum Reverse Recovery Time ¹⁾	t _{rr}	75			63			ns						
Typical Thermal Resistance	R _{θJA}	180						°C/W						
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150						°C						

1) Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A

Fig.1 Forward Current Derating Curve

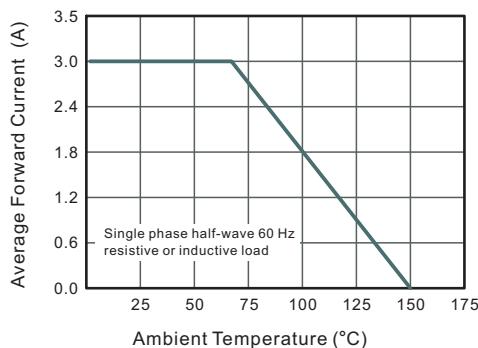


Fig.2 Typical Reverse Characteristics

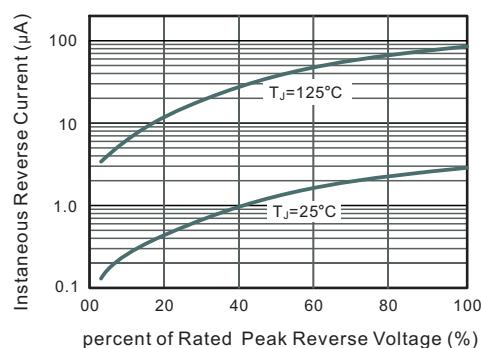


Fig.3 Typical Instantaneous Forward Characteristics



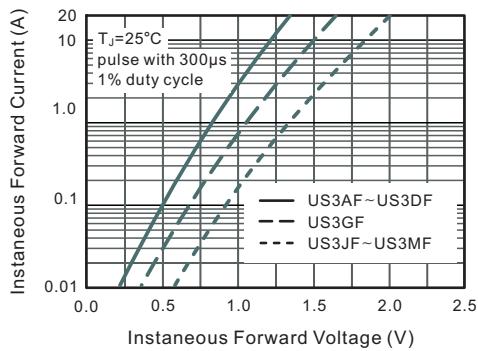


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

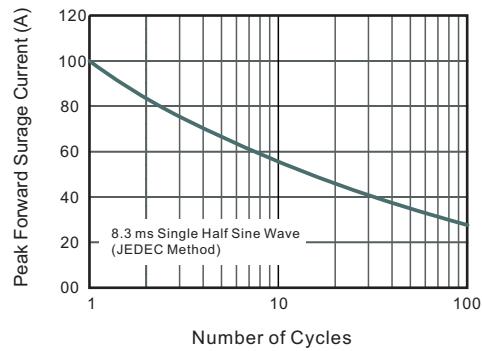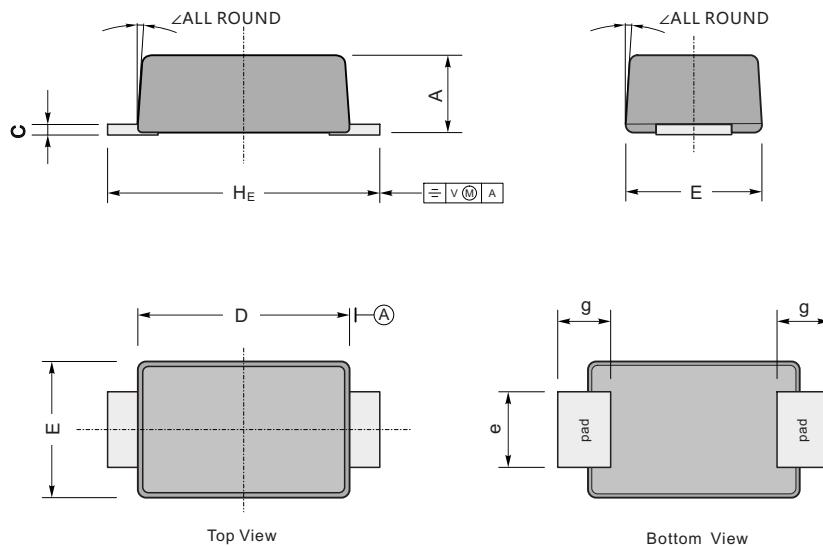


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMAF


UNIT		A	C	D	E	e	g	H _E	∠
mm	max	1.1	0.20	3.7	2.7	1.6	1.2	4.9	7°
	min	0.9	0.12	3.3	2.4	1.3	0.8	4.4	
mil	max	43	7.9	146	106	63	47	193	7°
	min	35	4.7	130	94	51	31	173	

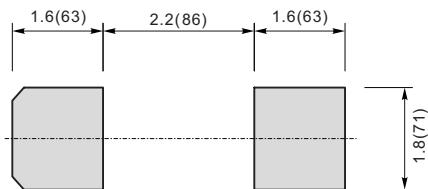The recommended mounting pad size


Unit: mm(mil)